

NorthStar Speciality Marine and Stereo Batteries are the Ultra High Performance solution for your custom audio system. Built to provide the longest reserve capacity possible, and the highest vibration resistance available. Don't miss a beat with the NSB-SMS battery line.

- Pure Lead AGM Technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Quick starting every time
- Cycles over 900 times to 50% depth of discharge
- Faster recharge than conventional batteries
- Proudly made in the USA at the most state-of-theart battery plants
- DEM fit is ensured built to exact BCI standards
- Housed in advanced plastics for durability, performance and heat resistance
- Advanced Pure Lead AGM construction means no water levels to check or terminals to clean
- Approved as non-hezerdous cargo for ground, sea, and air transport
  - DOT 49CFR173.159(d), (i) and (ii)














## CAR AUDIO DEMANDS MORE THAN EVER BEFORE

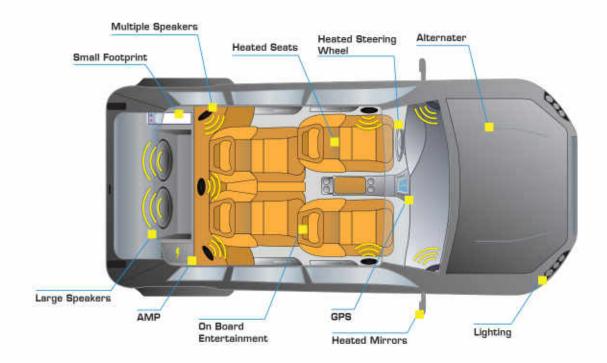

Part Number	BCI Group Number	Pulse Cranking Amps (A)	CCA Rating at 0° F (A)	CA/MCA Rating at 32° F (A)	Reserve Capacity (min)	Capacity - 20 Hour Rate (1.75 vpc) (Ah)	Height w/ Terminal (in)	Width (in)	Length wiRib (in)	Weight (lbs)	Terminal Configuration	Internal Resistance (mΩ)	Short Circuit Current (A)
Heavy Duty / Specialty													
NSB-AGM31	31	2150	1150	1370	220	. 103	9.25	6.77	1291	75	Threaded .	2.2	4100
SMS-AGM 8Dk*	8D	3125	2250	2700	500	228	9.52	31.1	20.5	187	Multiple	1.0	9900
SMS-AGM 24k*	24	1500	840	1010	160	76	8.86	6.77	10.87	57	SAE .	3.0	3300
SM5-AGM 80**	Specialty	820	400	580	70	40	82	3.8	9.8	31	Bolt in	7.2	1500
SM5-AGM 220**	Specialty	1620	830	1160	230	105	11.3	4.2	15.6	74	Bolt in	2.6	3500
SMS -AGM 400**	Specialty	2260	1260	1620	400	182	12.6	4.92	22.05	132	Bolt in	2.1	6000
SM5 -AGM 480**	Specialty	2440	1420	1740	480	217	12.9	4.96	22	152	Bolt in	2.6	3300

NorthStar Battery Company LLC

4000 Continental Way Springfield, MO 65803 Tel: +1 417 575 8200 GUALITY ASSURED ISO 9001

